


東成針車行有限公司

Tung Shing Sewing Machine Co., Ltd.

Main Office: 61-65 Nam Cheong St., G/F., Shamshuipo, Kowloon, Hong Kong. Tel.: 2725 4633 Fax: (852) 2725 5375

Branch Office: 54A, Hung To Rd., G/F., Kwun Tong, Kowloon, Hong Kong. Tel.: 2389 2227 Fax: (852) 2343 0959

台灣電子卡鈕呎

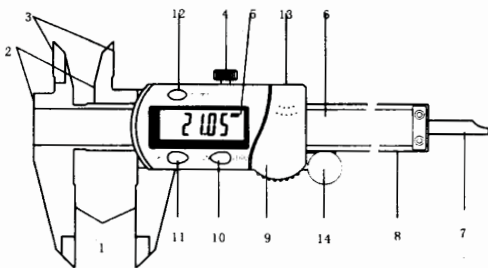

CALIPER FEATURES

- | | |
|----------------------------|---------------------------|
| 1. Outside Measuring Faces | 8. Beam |
| 2. Step Measuring Faces | 9. Battery Compartment |
| 3. Inside Measuring Faces | *10. ON/ZERO(ZERO) Switch |
| 4. Slider Clamp Screw | *11. OFF(ON/OFF) Switch |
| 5. LCD | 12. in/mm Switch |
| 6. Main Scale | 13. Output Connector |
| 7. Depth Measuring Blade | *14. Thumb Roller |
| * Selected Models | |

FUNCTION

- This caliper features holding the measured value at any position and zero setting at any position to make differential measurements.
- The caliper can be turned on by pressing ON/ZERO key or move the main scale.
- The caliper will turn off automatically if no any operation in 4 minutes.
- On the upper right side of the slider is a serial output, which can interface with a computer or printer via a special converter to process data.